

Electrical Exit Device  
Electrical Trim

## Standalone Alarm Panic Exit Device

### CMP400-DJ

### CMP400-DJ-AC: with ANSI cylinder

1. Voice alarm. English, Spain, all languages are available
2. Reset by key
3. Battery With 2 years of standby time
4. Power shortage(voltage less than 7V) alarm by red LED
5. Alarm is shutdown by key.
6. ANSI cylinder is optional
7. Voltage: 9V DC
8. Material: 304 or stainless steel painted



## Delayed Egress Panic Exit Devices

### CMP401-DE-ALM-LM-KO

### CMP406-DE-TBM-KO

Standalone and access control online version is available.

1. Delay egress, optional 0, 5, 10, 15 seconds
2. Down counter display
3. key to stop alarm and reset immediately
4. key to open door
5. Fail safe
6. Material: 304 or stainless steel painted
7. Monitoring:
  - LM - Latchbolt Monitoring
  - ALM-auxiliary Latch Monitoring
  - TBM-Top or Bottom bolt Monitoring
  - KO -Key override Monitoring
8. Voltage: 12V DC
9. Operation currency: 300mA



## Standalone Alarm Modular For CMP450 CMPA45X-DJ series

1. Voice alarm. English, Spain, all languages are available
2. Reset by key
3. Battery With 2 years of standby time
4. Power shortage(voltage less than 7V) alarm by red LED
5. Alarm is shutdown by key.
6. ANSI cylinder is optional
7. Voltage: 9V DC
8. Material: 304 or stainless steel painted



## Delayed Egress (DE) Modular for CMP450 series CMP45X-DE CMP46X-DE

### Function:

Touch bar more than 2 seconds, the alert is triggered, only after 1-15 seconds (by settings), alarm stop and door can be open.

Key or by access control system to stop alert, and open door.

### Specification:

1. Operation voltage: 12-24V DC
2. Operation current: 300mA
3. Monitor latch, touch bar, signal to access control system
4. Down counter display
5. Material: 304 or stainless steel painted



## Electrical Latch Retraction (ELR) Modular for CMP450 series and CMP955 CMP450-ELR, CMP46X-ELR CMP955-ELR

### Function :

Latch automatic retract by motor, release by solenoid

### Specification:


1. Motor driving to retract latch/mortise lock latchbolt and deadbolt/top and bottom bolt
2. Operation voltage: 12-24V DC;
3. Operation current: 500mA
4. Monitor latch, touch bar, trim, top and bottom bolts signal to access control system






## CMPA410-TD-EL/EU

1. Operation voltage: 12/24VDC, 12-24VDC
2. Operation current: 300/150mA
3. Fail safe/fail secure
4. None handed
5. Free wheel, clutch design
6. Interchangeable core cylinder, core 31.9mm, is optional:  
CMPA410-ACC-TD-EL/EU:

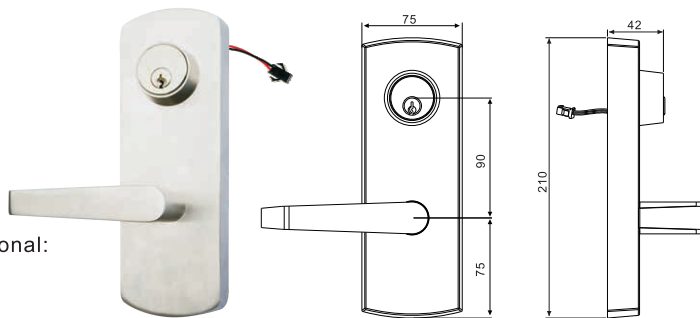


## CMPA420-TD-EL/EU

1. Operation voltage: 12/24V DC
2. Operation current: 300/150mA
3. Fail safe/Fail secure
4. None handed
5. Interchangeable core cylinder, core 31.9mm, is optional:  
CMPA420-ACC-TD-EL/EU

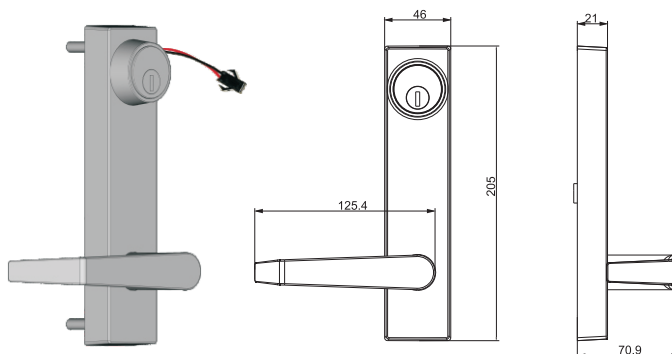

## Electronic trim

1. Door open authorization
  - 1) CMP910-M: fake pin, M1, key
  - 2) CMP910-Z: finger vein, M1, key
2. Standalone, wireless on line is available
3. Bluetooth and NFC is available
4. Specification
  - 1) Smart time feature allows for time functionality: time zones, time schedules, holiday
  - 2) Touch Pad Detect.
  - 3) Supports 1500 Nos of 6 digit PIN user codes, fake Pin code.
  - 4) Fingertip programmable
  - 5) Weather proof, -31° to +151°F (-35° to +66°C)
  - 6) Long-life, battery operated for 15,000 cycles respectively, 4AA batteries supplied, low battery alert
  - 7) Key override mortise cylinder, 1-1/4" supplied. (Supports 1-1/8", 1-1/4") . Also interchangeable cores available
  - 8) Non-handed; fully field-reversible
  - 9) Stainless steel 304 storefront
  - 10) Finishes 629, 630, PVD, AB


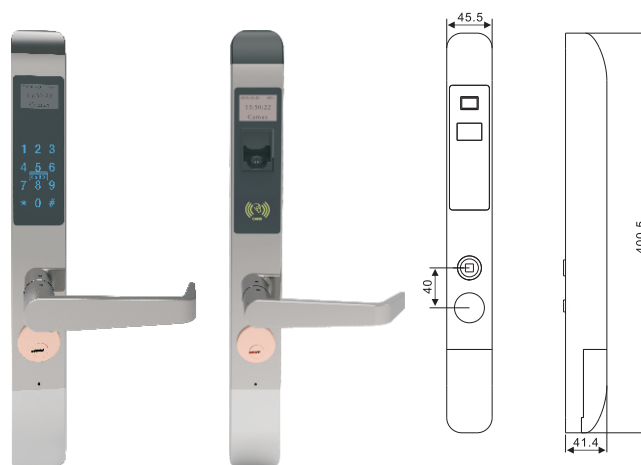


CMP910 M    CMP910 Z



Electrical Mortis Lock Body  
Electrical escutcheon trim

## CML850 Electrified Mortise Lock(solenoid driving) CML850EU-REX-ALM-LM-KO-DP(switches)-SSS(finish)-304/316(material)

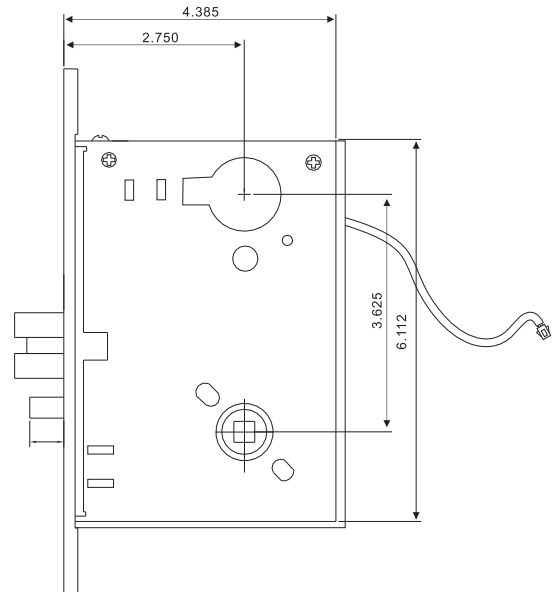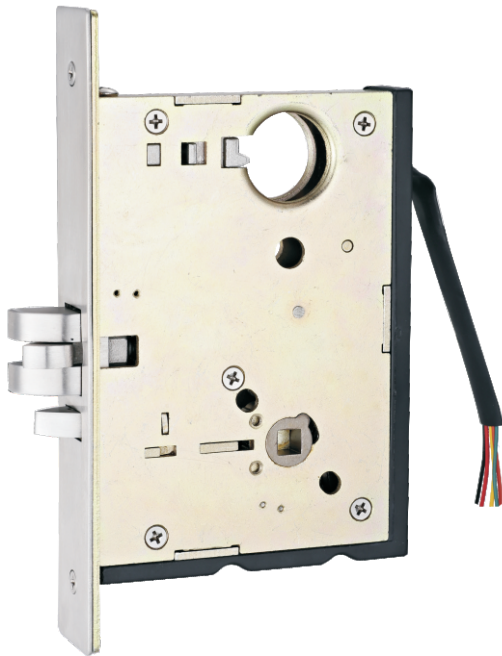

The CML850 series electrified mortise Lock utilizes CML800 series mortise mechanical platforms, it is suitable for all commercial applications.

The lock can be operated by intercom systems and key switches or integrated with electronic access control systems for use with higher security devices such as keypads or card readers. Designed with flexibility in mind, the one lock can cover all functions and is easily configured on site for the required application. Non monitored and monitored versions are available.





Certificate:

- A) A156.3, grade 1
- B) A156.25
- C) A156.5
- D) UL294
- E) UL10C&CAN-ULC-S104

|                       |                                                        |
|-----------------------|--------------------------------------------------------|
| Voltage               | 12V DC, 24V DC or 12-24V DC optional operating voltage |
| Current               | 300mA/150mA                                            |
| Monitoring            | Key override                                           |
|                       | Latch bolt                                             |
|                       | Auxiliary latch                                        |
|                       | Handle, request to exit                                |
|                       | Door position                                          |
| Fail secure/Fail safe |                                                        |
| Environment           | Operational temperature range -20°C to +60°C           |
| Backset               | 70mm                                                   |
| Distance              | 92mm                                                   |
| Latchbolt             | Stainless Steel 304, projection 19mm                   |
| Door thickness        | Standard applications 35 to 64mm                       |
| Door Clearance        | 3-6.5mm                                                |
| None handed           |                                                        |
| Cylinder              | Standard Camax round shaped cylinders                  |
| Furniture             | Compatible with Camax series door furniture            |
| Standard Finishes     | Satin finish                                           |

## CML855, with Deadbolt(Solenoid driving) CML855EL-REX-ALM-LM-DM-KO(switches)-SSS(finish)-304/316(material)

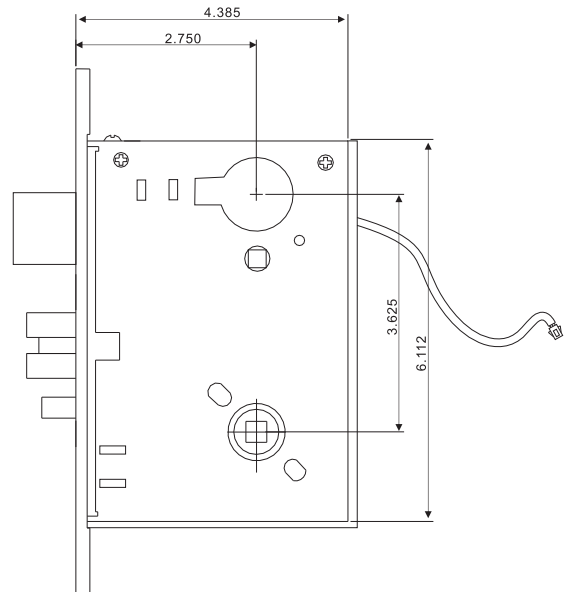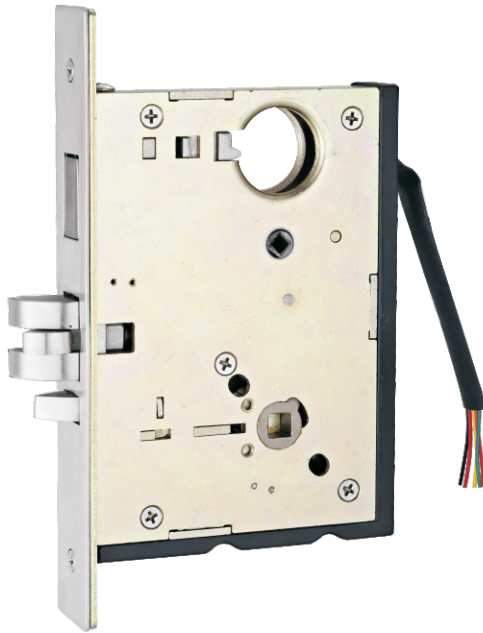





The CML850 series electrified mortise Lock utilizes CML800 series mortise mechanical platforms, it is suitable for all commercial applications.

The lock can be operated by intercom systems and key switches or integrated with electronic access control systems for use with higher security devices such as keypads or card readers. Designed with flexibility in mind, the one lock can cover all functions and is easily configured on site for the required application. Non monitored and monitored versions are available.




Certificate:  
A) A156.3, grade 1  
B) A156.25  
C) A156.5  
D) UL294  
E) UL10C&CAN-ULC-S104

|                       |                                                        |
|-----------------------|--------------------------------------------------------|
| Voltage               | 12V DC, 24V DC or 12-24V DC optional operating voltage |
| Current               | 300mA/150mA                                            |
| Monitoring            | Key override                                           |
|                       | Latch bolt                                             |
|                       | Auxiliary latch                                        |
|                       | Dead bolt                                              |
|                       | Handle, request to exit                                |
| Fail secure/Fail safe |                                                        |
| Environment           | Operational temperature range -20°C to +60°C           |
| Backset               | 70mm                                                   |
| Distance              | 92mm                                                   |
| Latchbolt             | Stainless Steel 304, projection 19mm                   |
| Door thickness        | Standard applications 35 to 64mm                       |
| Door Clearance        | 3-6.5mm                                                |
| None handed           |                                                        |
| Cylinder              | Standard Camax round shaped cylinders                  |
| Furniture             | Compatible with Camax series door furniture            |
| Standard Finishes     | Satin finish                                           |

| Outside Inside                                                                      | SKU      | Type                                                              | Function Description                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------|----------|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | CML850ES | Electrically Secure and Safe, split spindle<br>CML850EL+ES1-TD-EU | Outside levers unlocked by 12V or 24V DC electrically, power failure keeps outside lever locked;<br>Inside levers locked by 12V or 24V DC electrically, power failure keeps inside lever unlocked;<br>Auxiliary latch deadlocks latchbolt when door is closed.<br>Latchbolt retracted by key outside any time              |
|                                                                                     | CML850EU | Electrically Unlocked, split spindle                              | Outside lever unlocked by 12 or 24V DC. Latchbolt retracted by key outside or by inside lever. Switch or power failure keeps outside lever locked. Auxiliary latch deadlocks latchbolt when door is closed. Inside lever is always free for immediate egress. Keys are for the emergency.                                  |
|    | CML850EL | Electrically Locked, split spindle                                | Outside lever continuously locked by 12 or 24V DC. Latchbolt retracted by key outside or by inside lever. Switch or power failure allows outside lever to retract latchbolt. Auxiliary latch deadlocks latchbolt when door is closed. Inside lever is always free for immediate egress. Keys are for the emergency.        |
|                                                                                     | CML852EU | Electrically Unlocked Both Sides, Solid spindle                   | Outside and inside levers unlocked electrically. Latchbolt retracted by key either side. Switch or power failure keeps inside and outside levers locked. Auxiliary latch deadlocks latchbolt when door is closed. Keys are for the emergency.                                                                              |
|  | CML852EL | Electrically Locked Both Sides, Solid spindle                     | Outside and inside levers continually locked electrically. Latchbolt retracted by key either side. Switch or power failure allows inside and outside levers to retract latchbolt. Auxiliary latch deadlocks latchbolt when door is closed. Keys are for the emergency.                                                     |
|                                                                                     | CML855EU | Electrically Unlocked (with deadbolt), split spindle              | Function same as CML850EU, deadbolt as additional point of locking. Deadbolt thrown and retracted by key outside and thumbturn inside. Also could be retracted by both sides lever. Inside lever is always free for immediate egress. Auxiliary latch deadlocks latchbolt when door is closed. Keys are for the emergency. |
|  | CML855EL | Electrically Locked (with deadbolt), split spindle                | Function same as M850EL, deadbolt as additional point of locking. Deadbolt thrown and retracted by key outside and thumbturn inside. Also could be retracted by both sides lever. Inside lever is always free for immediate egress. Auxiliary latch deadlocks latchbolt when door is closed. Keys are for the emergency.   |

## CML860 Electrified Mortise Lock(Motor driving) CML860-REX-ALM-LM-DM-KO-NM(No motor)

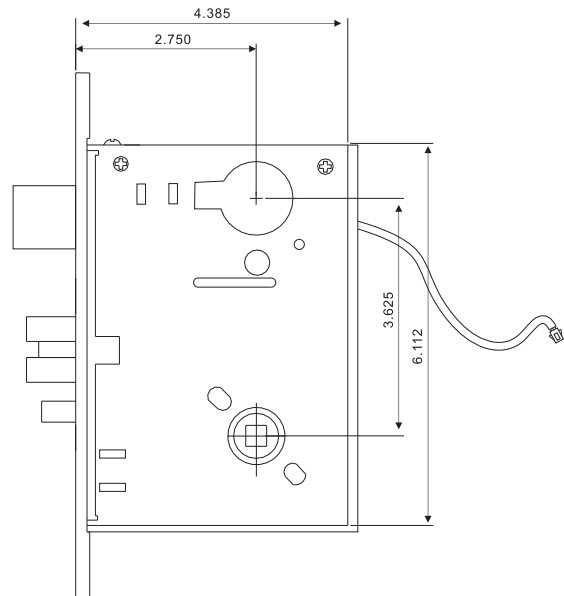

The CML 860 series electric mortise Lock is utilizes CML800 series mortise mechanical platforms, it is suitable for all standalone applications.

Non monitored and monitored versions are available.

Compliance:


ANSI/BHMAA156.25-2007, grade 1;

ANSI/BHMAA156.13-2005, grade 1;

UL 10C fire rated 3 hours.

|                   |                                              |
|-------------------|----------------------------------------------|
| Voltage           | 3.3V - 6VDC                                  |
| Monitoring        | Key override                                 |
|                   | Latch bolt                                   |
|                   | Dead bolt                                    |
|                   | Auxiliary latch                              |
|                   | Handle                                       |
| Environment       | Operational temperature range -20°C to +60°C |
| Backset           | 70mm                                         |
| Distance          | 92mm                                         |
| Latchbolt         | Stainless Steel 304, projection 19mm         |
| Deadbolt          | Stainless Steel 304, projection 25.4mm       |
| Door thickness    | Standard applications 35 to 64mm             |
| Door Clearance    | 3-6.5mm                                      |
| None handed       |                                              |
| Cylinder          | Standard Camax round shaped cylinders        |
| Furniture         | Compatible with Camax series door furniture  |
| Standard Finishes | Satin finish                                 |

72-55/60/65TD(Solenoid driving)  
72-60TD-S24-FA01-S/T(spindle)-EL/EU-ALM-DM-HD-KO  
(switches)-SSS(finish)-304/316(material)

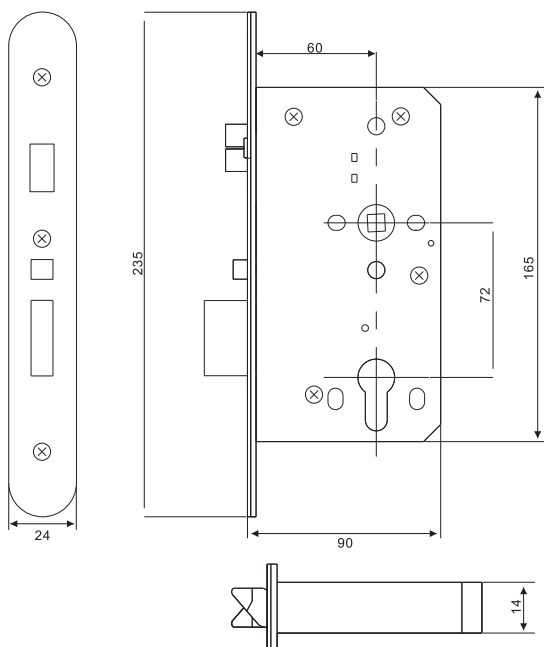

1. Automatic deadbolt locking.
2. Bolt projection, one throw, 20mm
3. No handed
4. Free wheel, clutch design
5. Suitable for access control system




Certificate(Pending):  
EN12209-2016: 3X9-0G20  
EN179: 376B1342AB  
EN1125: 376B1321AA  
EN1634-1: fire rated 4 hours  
EN14846: 3S8D-L611  
EN61000-6-1, EN61000-6-3

|                                       |                                                        |
|---------------------------------------|--------------------------------------------------------|
| Voltage                               | 12V DC, 24V DC or 12-24V DC optional operating voltage |
| Current                               | 300mA/150mA                                            |
| Monitoring                            | Key override(KO)                                       |
|                                       | Auxiliary latch(ALM)                                   |
|                                       | Dead bolt(DM)                                          |
|                                       | Handle down(HD)                                        |
| S : Split spindle;T : Through spindle |                                                        |
| Fail secure/Fail safe                 |                                                        |
| Environment                           | Operational temperature range -20°C to +60°C           |
| Backset                               | 55/60/65mm                                             |
| Distance                              | 72mm                                                   |
| Door thickness                        | Standard applications 35 to 64mm                       |
| Door Clearance                        | 3-6.5mm                                                |
| None handed                           |                                                        |
| Cylinder                              | Standard European profile cylinders                    |
| Furniture                             | Compatible with Camax series door furniture            |
| Standard Finishes                     | Satin finish                                           |



## 72-65TM(Motor Driving)

### 72-65TM-LM-ALM-DM-HD-KO

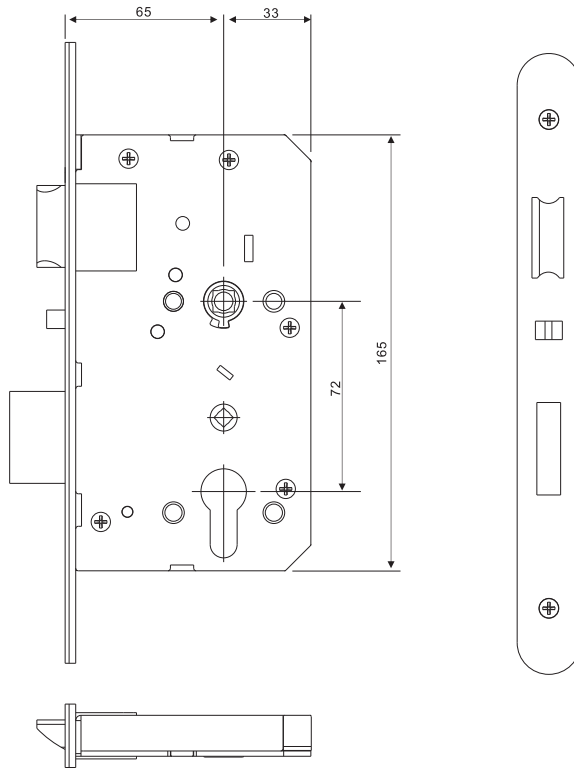


1. Motor inside
2. Bolt projection, one throw, 20mm
3. With auxiliary latchbolt
4. With mechanical thumbturn function(DND)
5. Handed
6. Suitable for electronic lock, hotel lock

|                   |                                              |
|-------------------|----------------------------------------------|
| Voltage           | 3.3V - 6VDC                                  |
| Monitoring        | Latch(LM)                                    |
|                   | Auxiliary latch(ALM)                         |
|                   | Dead bolt(DM)                                |
|                   | Handle down(HD)                              |
|                   | Key override(KO)                             |
| Environment       | Operational temperature range -20°C to +60°C |
| Backset           | 65mm                                         |
| Distance          | 72mm                                         |
| Latchbolt         | Stainless Steel 304, projection 15mm         |
| Deadbolt          | Stainless Steel 304, projection 21mm         |
| Door thickness    | Standard applications 35 to 64mm             |
| Door Clearance    | 3-6.5mm                                      |
| Handed            |                                              |
| Cylinder          | Standard European profile cylinders          |
| Furniture         | Compatible with Camax series door furniture  |
| Standard Finishes | Satin finish                                 |

## 72-65TMB(Motor Driving)

### 72-65TMB-LM-ALM-DM-HD-KO


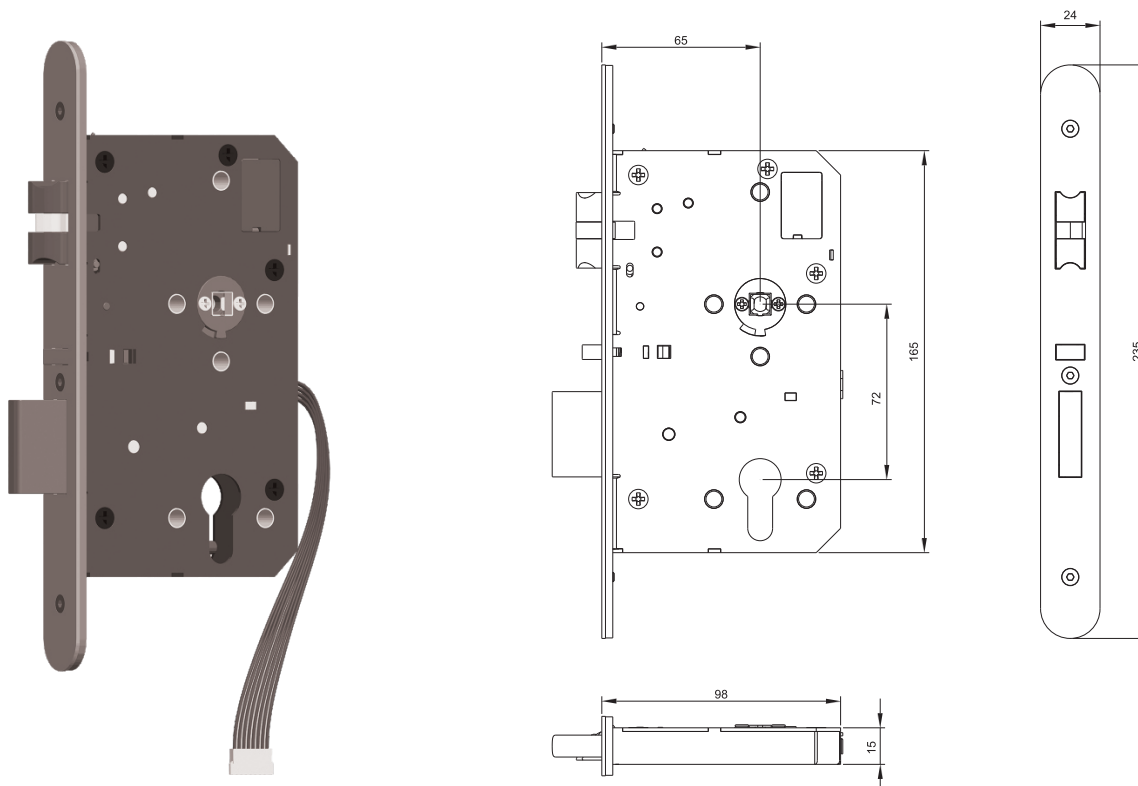


When the door close, the lock becomes locked automatically. The dead bolt throws out and the latch bolt is blocked.  
 When the controlled handle or panic handle is down, the dead bolt is withdraw inside the lock case and the latch bolt is release consequently.  
 Mechanical opening using key cylinder is always possible from both sides and the lock can be opened by inside handle (anti-panic feature)  
 The lock is without thumbturn(DND function)

|                   |                                              |
|-------------------|----------------------------------------------|
| Voltage           | 3.3V - 6VDC                                  |
| Monitoring        | Auxiliary latch(ALM)                         |
|                   | Dead bolt(DM)                                |
|                   | Handle down(HD)                              |
|                   | Key override(KO)                             |
| Environment       | Operational temperature range -20°C to +60°C |
| Backset           | 55mm                                         |
| Distance          | 72mm                                         |
| Latchbolt         | Stainless Steel 304                          |
| Deadbolt          | Stainless Steel 304, projection 21mm         |
| Door thickness    | Standard applications 35 to 64mm             |
| Door Clearance    | 3-6.5mm                                      |
| None handed       |                                              |
| Cylinder          | Standard European profile cylinders          |
| Furniture         | Compatible with Camax series door furniture  |
| Standard Finishes | Satin finish                                 |

## 72-55TMC(Motor driving)

### 72-55TMC-ALM-DM-HD-KO

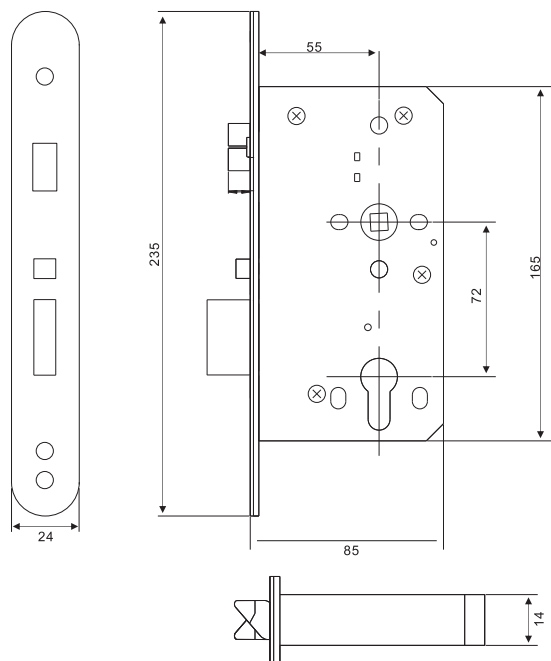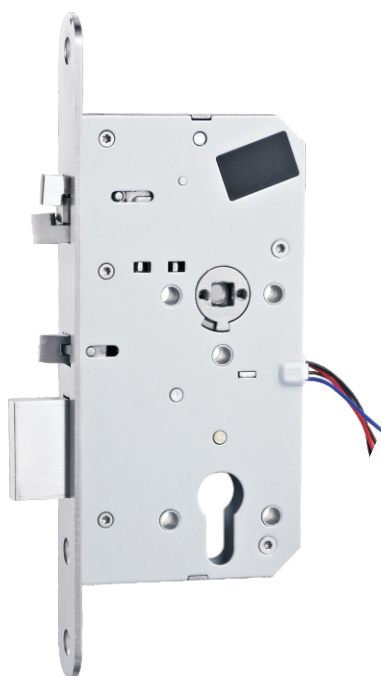


When the door close, the lock becomes locked automatically. The dead bolt throws out and the latch bolt is blocked.  
 When the controlled handle or panic handle is down, the dead bolt is withdraw inside the lock case and the latch bolt is release consequently.  
 Mechanical opening using key cylinder is always possible from both sides and the lock can be opened by inside handle (anti-panic feature)  
 The lock is without thumbturn(DND function)

|                   |                                              |
|-------------------|----------------------------------------------|
| Voltage           | 3.3V - 6VDC                                  |
| Monitoring        | Auxiliary latch(ALM)                         |
|                   | Dead bolt(DM)                                |
|                   | Handle down(HD)                              |
|                   | Key override(KO)                             |
| Environment       | Operational temperature range -20°C to +60°C |
| Backset           | 55mm                                         |
| Distance          | 72mm                                         |
| Latchbolt         | Stainless Steel 304                          |
| Deadbolt          | Stainless Steel 304, projection 21mm         |
| Door thickness    | Standard applications 35 to 64mm             |
| Door Clearance    | 3-6.5mm                                      |
| None handed       |                                              |
| Cylinder          | Standard European profile cylinders          |
| Furniture         | Compatible with Camax series door furniture  |
| Standard Finishes | Satin finish                                 |


## 40TDA (Solenoid driving)

1. Operation voltage: 12-24VDC
2. Operation current: 150/90mA
3. Fail safe
4. None handed
5. Stainless steel 304
6. Monitoring: latchbolt
8. Operation temperature: -20°C-60°C

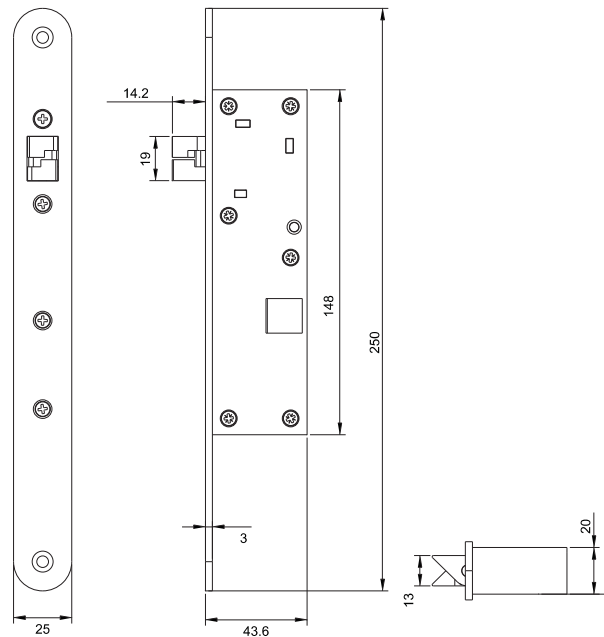

## 40TDB (Solenoid driving) 40TDB-LM-KO

1. Operation voltage: 12-24VDC
2. Operation current: 150/90mA
3. Monitor key override optional
4. Fail secure
5. None handed
6. Stainless steel 304
7. Monitoring: latchbolt, key override
8. Operation temperature: -20°C-60°C

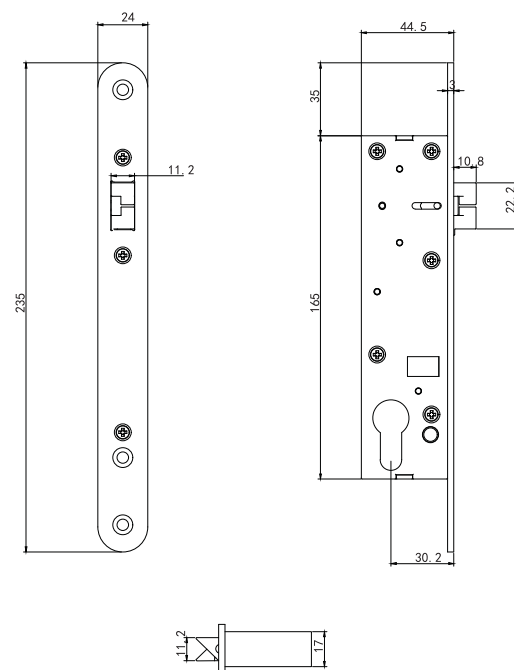


## 45D-TM(Motor driving) 45D-TM-LM-ALM-DM-KO

Automatic deadbolt thrown when door close.

Motor inside to drive the deadbolt retract.

Key override


1. Operation voltage: 12-24V DC
2. Operation current: 110mA
3. Monitor latch, auxiliary latch, deadbolt, key override
4. None handed
5. Stainless steel 304
6. Backset: 45mm
7. None handed
8. Operation temperature: -20°C-60°C

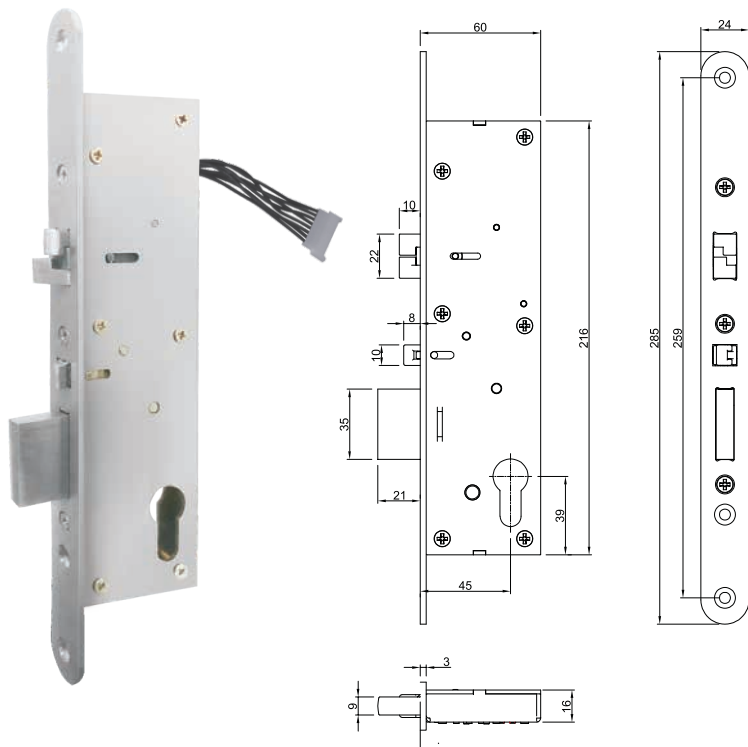

## ES1-TD(Solenoid driving)

Electrified trim for ANSI mortise lock

1. Operation voltage: 12-24V DC
2. Operation current: A300/150mA
3. Fail secure
4. None handed
5. Stainless steel 304

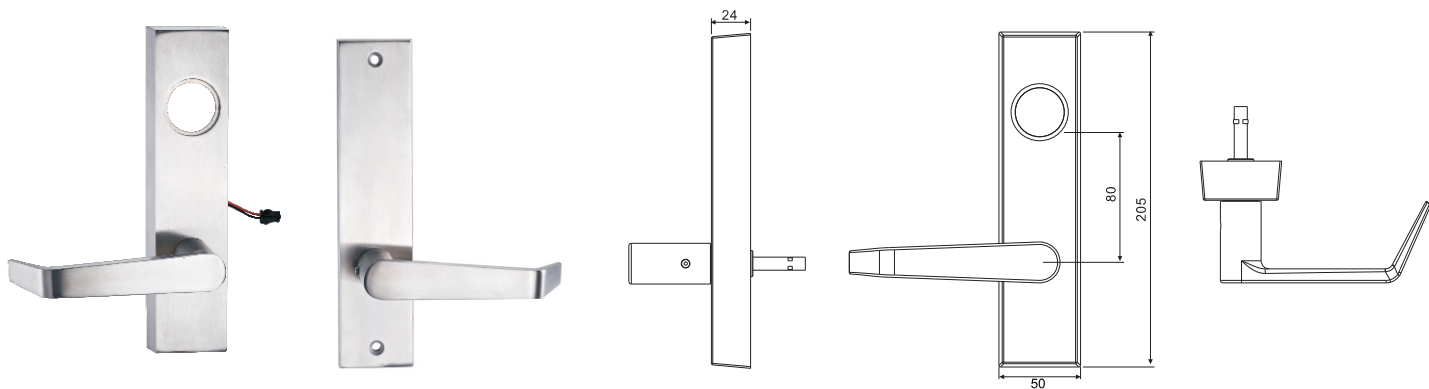



Electronic lock

## wLock-20

### Wireless electronic lock

Wireless connect to CamaxBSS

It can install to metal door, wooden door and profile door

Specification:

1. Battery Standby up to 1 year
2. Long range wireless technology, 100 meters
3. User record 1,000
4. Even record 5, 000
5. Support event planing
6. Wireless real- time transmission
7. Battery 2AA
8. Remote control
9. Authorize: card, BLE ( optional)
10. Key override
11. Outdoor emergency power supply
12. Support lock distance: 72, 85, 92mm



Mifare card





Key



Wireless



wLock-20

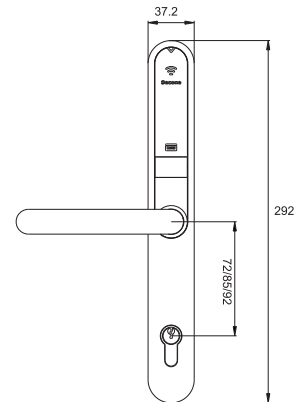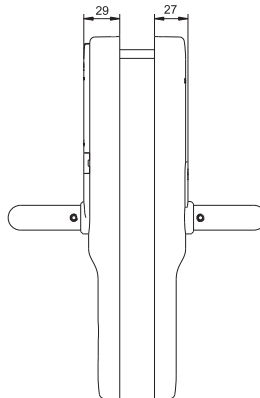





## wLock40

Wireless finger vein electronic lock



### Finger vein versus Fingerprint

1. Finger vein based authentication is more accurate and it has lower False Rejection Rate
2. Finger vein authentication is less invasive technology
3. Finger veins do not leave latent prints behind on the scanning surface
4. Finger vein authentication is not affected by weather or age related effects on the skin surface
5. Finger vein authentication technology requires less maintenance

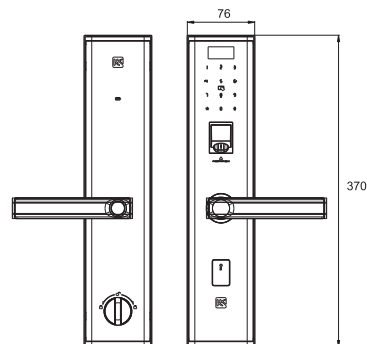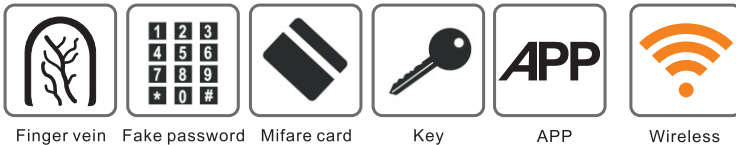

### For high security area

Wireless connect to CamaxBSS

It can install to metal door, wooden door

### Specification:

1. Standby up to 2 year
2. Long range wireless technology, 100 meters
3. User record 1,000
4. Even record 5,000
5. Support event planing
6. Wireless real-time transmission
7. Battery 4AA
8. Remote control
9. Authorize: card, BLE(optional)
10. Key override
11. Outdoor emegency power supply
12. Authorise is 2 lever: deadbolt sensing prevents access to unauthorized cards when deadbolt is thrown

## wLock60

Wireless electronic lock,ANSI



Mifare card



Key



Wireless



Wireless connect to CamaxBSS  
It can install to metal door, wooden door

### Specification:

1. Battery to 2 year
2. Long range wireless technology, 100 meters ,
3. User record 1,000
4. Even record 5,000
5. Support event planing
6. Wireless real-time transmission
7. Battery 4AA
8. Remote control
9. Authorize: card, BLE (optional)
10. Key override
11. Outdoor emegency power supply
12. Authorise is 2 lever: deadbolt sensing  
prevents access to unauthorized cards when deadbolt is thrown

# Hub and Control Box

## AC-100




AC-100 is a full function hub. It support all Camax wireless devices and Wiegand protocol.

### Specification

1. One hub manage wireless devices up to 64
2. 4 ports of Wiegand 26 or 34 wall cardreaders and door contact.
3. Auto-detect nearby wireless devices
4. Long range wireless technology, 100 meters
5. Users up to 60,000
6. Real-time transmission
7. Built-in hardware watchdog and self-inspection circuit ensures steady and reliable operation of the hardware
8. Power: 12V DC
9. Current: 3A

## MB-100



AC-100 is a POE hub, It support all Camax wireless devices

### Specification

1. One hub manage wireless devices up to 64
2. Auto-detect nearby wireless devices
3. Long range wireless technology, 100 meters
4. Users up to 60,000
5. Real-time transmission
6. Built-in hardware watchdog and self-inspection circuit ensures steady and reliable operation of the hardware
7. Power: POE or 12V DC optional

## ASPC-100

### Single door access control unit

1. 3x Dry signal output
2. 3x Dry signal input
3. Includes UPS manage unit
4. Power: 110-220V
5. 2x 12/24V DC output:
6. 2x reset buttons
7. Anti-surge and anti-overload design
8. Bee to alarm
9. Light indicate
10. serial-port communication, can become expansion board of access control main board



## ASPC-200

### Access Control Box

Size 330mmX240mmX65mm

1. Included all function of single door access control unit
2. 4x single door access control unit + 1x MB100
3. Power: 110-220V





# Encoder and Card Reader



## EN-NW-01

Encoder

1. Power by POE or USB
2. Build-in encryption algorithm to secure data
3. Support M1 series card
4. Connect to the server by network



## WCR-100

Card reader+Keypad



## WCR-120

Card reader



# Power Transfer Device

## Electrified Butt Hinge


TD504034

TD454034


Compliance to ANSI/BHMAA156.1, grade 1

Cables up to 8 pins

Material: stainless steel

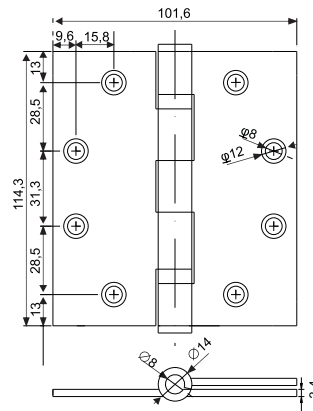

D454034-2BB

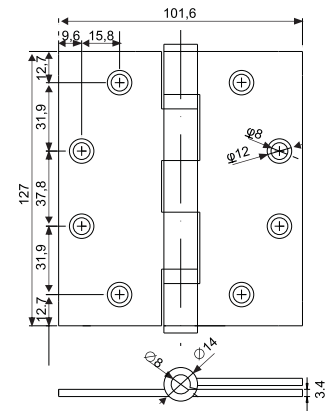


D504034-2BB

## PTD200/500, Power Transfer Device

Material: stainless steel 304




PTD200: length 330

PTD500: length 500




## EG-300, Electrical Pin Transfer

Max 7 cables

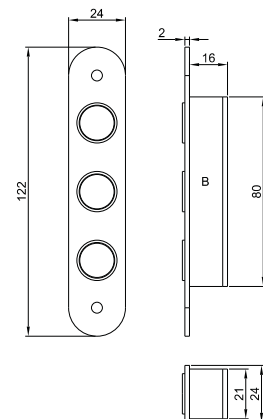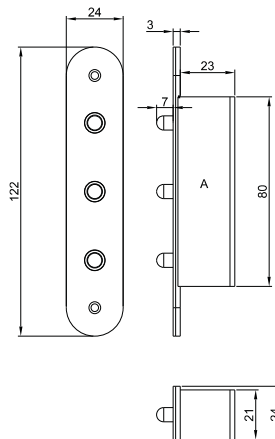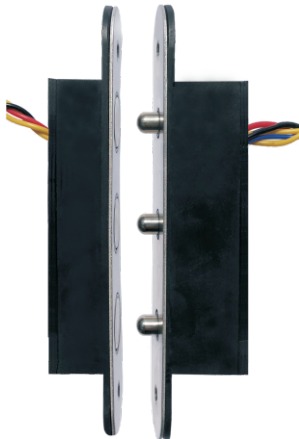

Electromagnetic lock  
Electrical strike


S172-Y



S172-E



ES-13

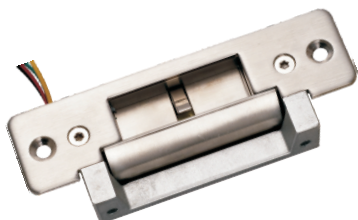

ES-20



ES-21



## Electromagnetic lock for single door

### Specifications:

Voltage Input: 12 VDC/24 VDC  
 Current Draw: 12V/500mA; 24V/250mA (+5%)  
 Holding Force : Up to 600 lbs (272 kg)  
 Hall Effect Contact: SPDT rated 2A at 24 VDC  
 Anti-Rust Surface Treatment: Blue Zinc Plating  
 Operating Temperature : 0~55°C (32~131°F)  
 Operating Humidity : 0~95% (non condensing)  
 Weight ( Magnet): 1.1kg (±1%)  
 Dimensions :  
 Magnet- (L)250x(W)42x(T)25 mm  
 Armature - (L)180x(W)38x(T)11 mm

## Electromagnetic lock for double door

### Specifications:

Voltage Input: 12 VDC/24 VDC (per Magnet)  
 Current Draw: 12V / 500mA; 24V / 250mA (+5%)  
 Holding Force :Up to 600 lbs x2 (272 kg x2)  
 Hall Effect Contact : SPDT rated 2A at 24 VDC  
 Anti-Rust Surface Treatment : Blue Zinc Plating  
 Operating Temperature : 0~55°C (32~131°F)  
 Operating Humidity : 0~95% (non condensing)  
 Weight ( Magnet): 2.2kg (±1 %)  
 Dimensions :  
 Magnet - (L)500x(W)42x(T)25 mm  
 Armature - (L)180x(W)38x(T)11 mm

## ANSI Electric Strike

### Specifications:

Voltage input: DC12V(24V option)  
 Current draw: 220mA  
 Holding force: up to 500kg  
 Operating temperature: -10~+55C  
 Operating humidity:0~95%  
 Output: NO, COM, NC  
 Finish: SS  
 Lock type: power-on lock or power-off lock  
 Size: 124mmx43mmx35mm

## Electric Strike for Panic Exit Device

### Specifications:

Voltage input: DC12V/24V  
 Current draw: 12V/220mA or 24V/110mA  
 Holding force: up to 1,000kg  
 Operating temperature: -10~+55°C  
 Finish: powder coating, latch harden  
 Lock type: power-on lock or power-off lock  
 Open degree: 90  
 Work with panic exit device  
 Size: 230mmx40mmx30mm

## Electric Strike for Panic Exit Device

### Compliance: BS EN1154:1997

GB122905-2008, fire rated, 90 minutes

Function: Adjustable closing & latching speed

Suit for wooden and metal door

Optional built in HOLD-open

None handed

Material: Casting aluminum alloy body

Finish: Silver, optional golden

Feature:Spring power EN1-5, door weight 15-120KG

Max door width 1600MM

Max opening angle is 120 degree

Closing speed adjustable in the range 120-0 degree

Latching speed adjustable in the range 15-0 degree

Min door thickness: metal door 32mm, wooden door 42mm

# CamaxBSS

## Integrated Access Control & Video Management Solutions



Hotel Lock(OEM)

## Hotel Product(OEM)




ANSI Hotel Lock



EURO Hotel Lock



Room Reader and Indicator




MDU



Energy Saving Device



Elevator controller, wireless



Elevator controller

