

Door Handles
EN1906 Class 4
EN1634 Fire Rated 2 Hours

Door Handle Sets Class 4, fire rated 2 hours

Material: Stainless steel, stainless steel substructure
 Finish: Satin, Polished, PVD and AB
 Bearing: Lever handle pivot-fitted in rose, with height holding mechanism
 Standard: Certified in compliance with EN 1906:2012


Class: 47-1140U
 Standard: Certified in compliance with EN1634:2012
 Class: 2-hour fire rated




EN1634
EN1906

Category of use	Test cycles Durability	Door mass	Fire resistance	Safety for persons	Corrosion resistance	Security	Type of operation
4	7	-	1	1	4	0	B

Casting metal base rose and escutcheon Product item: CMHXXX-EN4

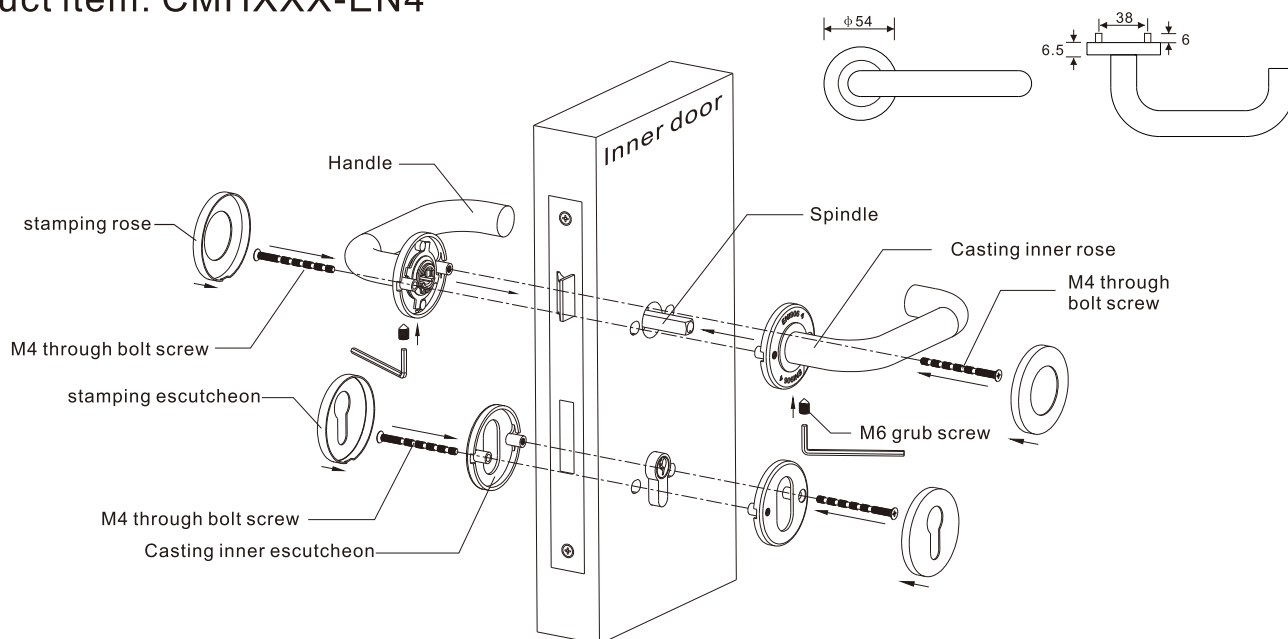


Metal frame with plastic base rose and escutcheon Product item: CMHXXX-EN4P

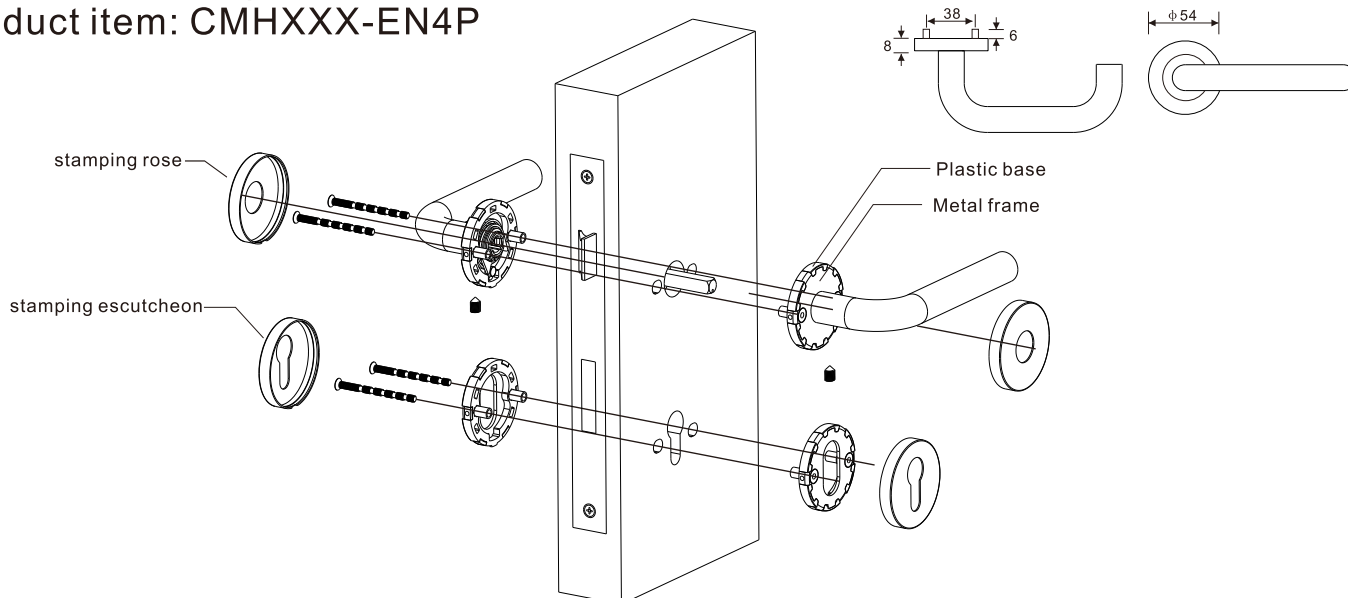





CMHP002-EN4




CMHP003-EN4




CMHP005-EN4




CMHP030-EN4




CMHP016H-EN4




CMH007-EN4 Taj




CMH014-EN4 Cognac




CMH027 Vodka




CMH042-EN4 Concerto




CMH056-EN4 Babylon




CMH060 Armagnac




CMH064-EN4 Waltz



CMH102-EN4 Symphony



CMH153-EN4 Sergeant



Door Handles
EN1906 Class 3
EN1634 Fire Rated 2 Hours

Door Handle Sets Class 3

Material: Stainless steel, stainless steel substructure

Finish: Satin, Polished, PVD and AB

Bearing: Lever handle pivot-fitted in rose with height holding mechanism

Standard: Certified in compliance with

EN 1906:2012

Class: 37-0140U


Standard: Certified in compliance with

EN1634:2012

Class: 2-hour fire rated



EN1634
EN1906

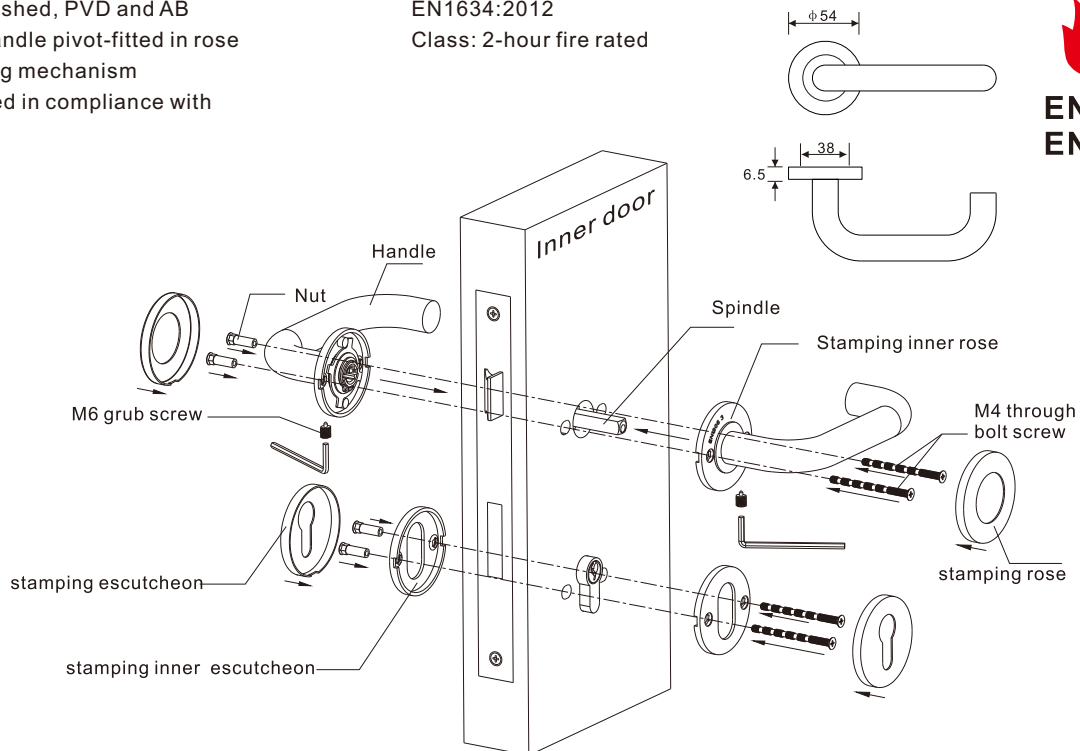


Category of use	Test cycles Durability	Door mass	Fire resistance	Safety for persons	Corrosion resistance	Security	Type of operation
3	7	-	0	1	4	0	B


	Supplied with	Door thickness mm
	2 Lever handle aperture parts with handle roses 1 Spindle 8 x 100 mm 1 Pair of CB escutcheons 4 Threaded screws M4 x 60 mm, can be shortened	38 – 55
	2 Lever handle aperture parts with handle roses 1 Spindle 8 x 100 mm 1 Pair of PC escutcheons 4 Threaded screws M4 x 60 mm, can be shortened	38 – 55
	2 Lever handle aperture parts with handle roses 1 Spindle 8 x 100 mm 1 Pair of WC escutcheons with red/green indicator disc 1 Locking pin 8 x 65 mm 4 Threaded screws M4 x 60 mm, can be shortened	38 – 55




CMHP002-EN3




CMHP003-EN3




CMHP005-EN3




CMHP030-EN3




CMHP016-EN3




CMH007-EN3 Taj




CMH014-EN3 Cognac




CMH017-EN3 Modern Feel




CMH027 Vodka




CMH037-EN3 Nanking




CMH039-EN3 Seoul




CMH042-EN3 Concerto




CMH048 Berlin




CMH056-EN3 Babylon




CMH060 Armagnac




CMH064-EN3 Waltz



CMH102-EN3 Symphony



CMH153-EN3 Sergeant




Crank Handles for Narrow-stile Doors


Crank handles for narrow-stile doors




CMH701




CMH702




CMH703




CMH704




CMH705





CMH706



CMH707



CMH708

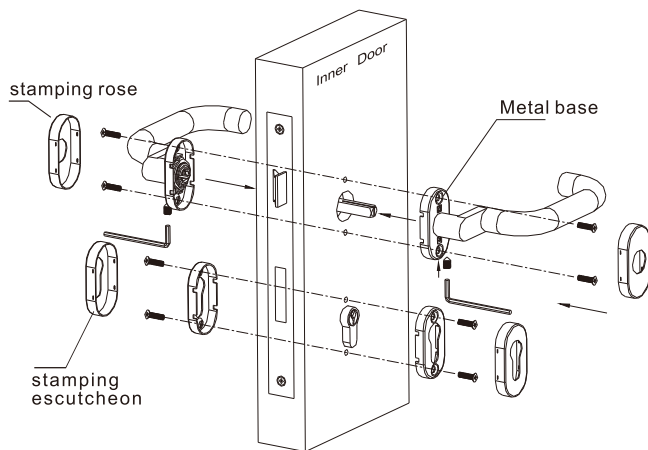

Model	Dimension LxWxH	C/C	Feature
RN01, EN01	60x32x10	44	Metal base
Rn02, EN02	60x32x10	44	Zinc alloy base
Rn03, EN03	74x33x14	50	Metal frame+plastic base

Narrow stile rose and escutcheon

Clip type
Spring-loaded
Fixing screw is invisible

